






CLOCK TOWER PEOPLE

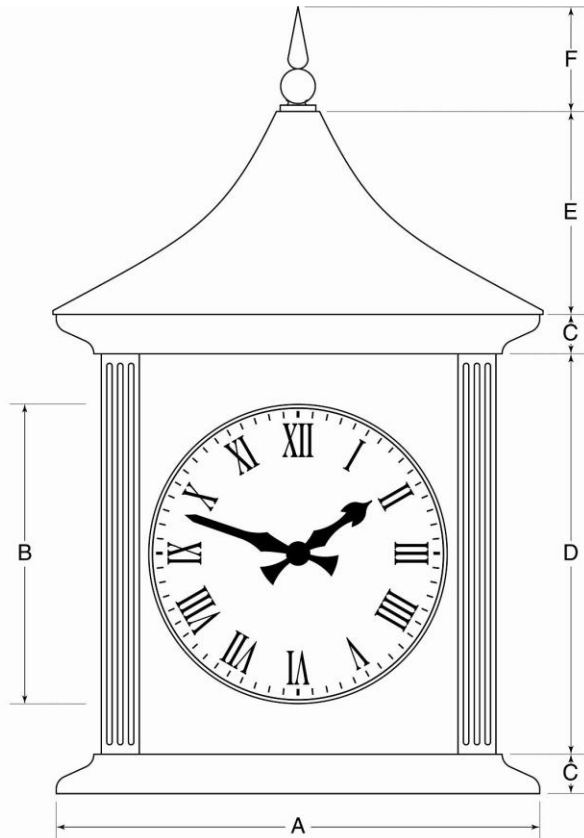

For all our towers, the client must first construct a suitable subframe to suit their roof pitch. The following dimensions and weights are for guidance only and it is ultimately the responsibility of the client or contractor to check suitability and loadings.

- i. Access from the roof space into the tower should be left open if possible.
- ii. Suggested measurements are based on treated timber, however steel frame solutions can be implemented to support the tower.
- iii. Timber frame should be boxed in with external quality plyboard and flashed in code 5 lead.

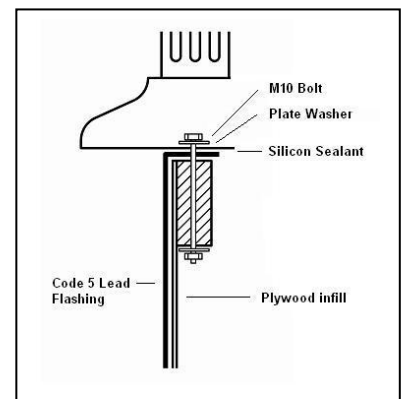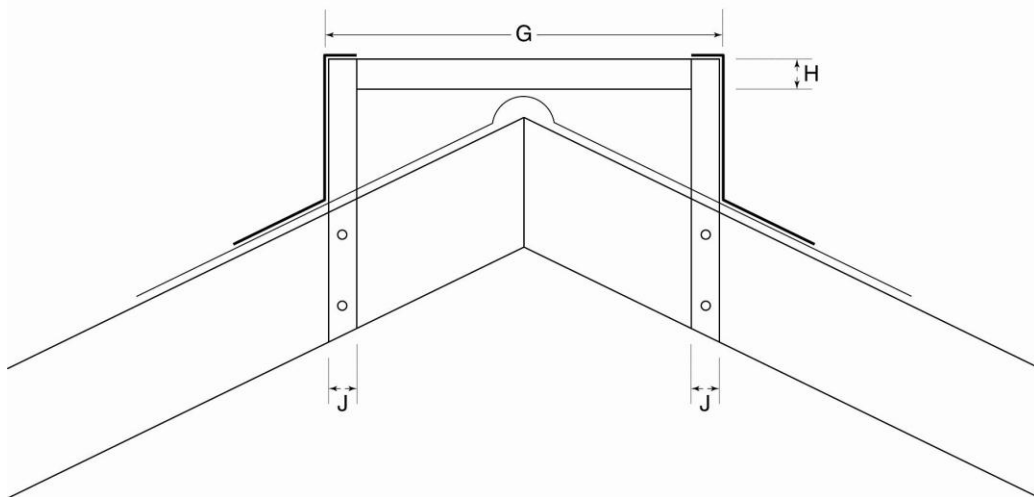

Type	A	B	C	D	E	F	G	H	Weight
CT2	1000mm	610mm (24")	100mm	700mm	500mm	300mm	800mm	75mm	45Kg
CT3	1200mm	760mm (30")	100mm	850mm	650mm	350mm	1000mm	100mm	60Kg
CT4	1500mm	920mm (36")	125mm	1050mm	750mm	350mm	1250mm	125mm	80Kg